

# TECH BRIEF

# 72

## MAXIframe® 202 BRACKET



The Judah MAXIframe® 202 Sill/Header Bracket has been modified to ensure there is no overhang of the section that could interfere with the linings, whilst still maintaining security of the MAXIjamb® Sill/Header section during installation. >>



**Judah®Steel**  
A VISION IS BORN

[www.Judah-Steel.com](http://www.Judah-Steel.com)

# MAXIframe<sup>®</sup> 202 BRACKET

---

The new 202 bracket design means one fixing flange is visible and the other invisible. Once the bracket is installed against the web of the MAXIjamb<sup>®</sup> using 4/#10 wafer head tek screws, the MAXIjamb<sup>®</sup> section has to be 'rolled' into place as illustrated (*figures 1-3*).

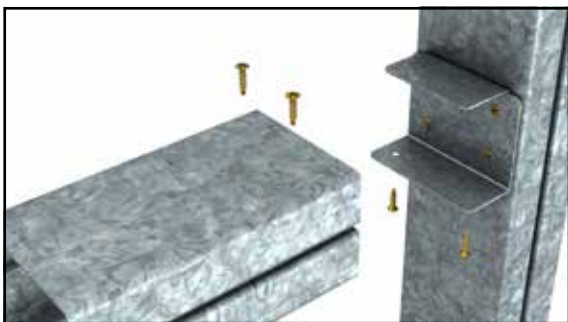


FIGURE 1



FIGURE 2

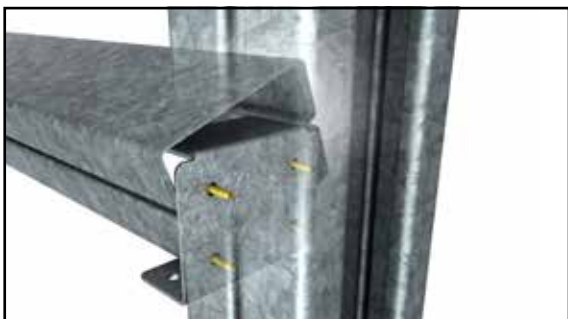


FIGURE 3

.....

The exposed flange has two pre-drilled holes for fixing to the MAXIjamb®, whilst the flange that is now inside the MAXIjamb® should be secured by fixing the screws through the top, 4" in from the inside jamb face and 4" from the outer edge of the section (*figure 4*).

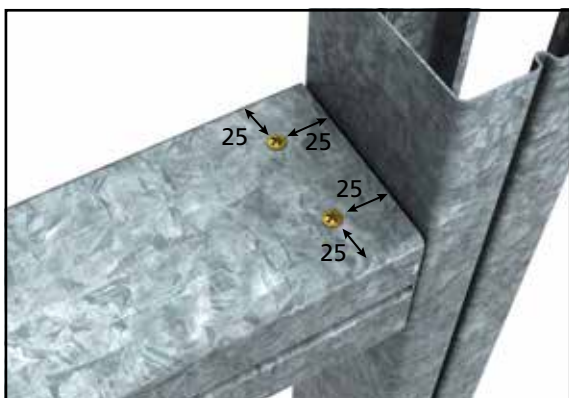


FIGURE 4

This new bracket is fixed to the MAXIjamb® with the shorter internal flange facing the opening.

For example: when securing the sill member the short flange faces up and when securing the header, it faces down. (*For your convenience, the Judah 202 Sill/Header Bracket is stamped accordingly on its inner face.*)

Once finally secured into place, the outer face of the 202 Sill/Header Bracket will align neatly with the face of the MAXIjamb® section, both internally and externally.



MAXIFRAME, MAXIJAMB and JUDAH are registered trademarks